


Elle 1



Design: Tommaso Cimini, 2019



Floor lamp for direct and indirect lighting with single pivotable arm. The head can rotate 180° and is provided with a screen grid for glare control. Equipped with a foot on-off and dimmer switch.

Finishing

Standard



Black soft touch
cod. 61L01ST00



Matt white
cod. 61L02OP00



Brushed nickel
cod. 61L4400

Special



Metallic bronze
cod. 61L29MT00

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight, uplight
- Light source: 2 led boards
- Source flux: 3980 lm
- Emitted flux: 2346 lm
- Efficacy: 49 lm/W
- CCT: 3000K
- CRI index: >95
- LLMF: 50000 h

Electrical Facts



- Source power: 45 W
- Power absorption: 48 W
- Stand-by absorption: < 1 W
- Grid voltage: 100 – 240 V AC / 50-60 Hz (EU/UK plug equipped)
- Power supply: internal AC-DC converter provided
- Dimmability: on-wire foot dimmer switch
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 6,8 Kg
- Certifications: pending
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging
cardboard box
211 x 33 x 13 (cm)
0,127 m³


Gross weight
9,3 Kg

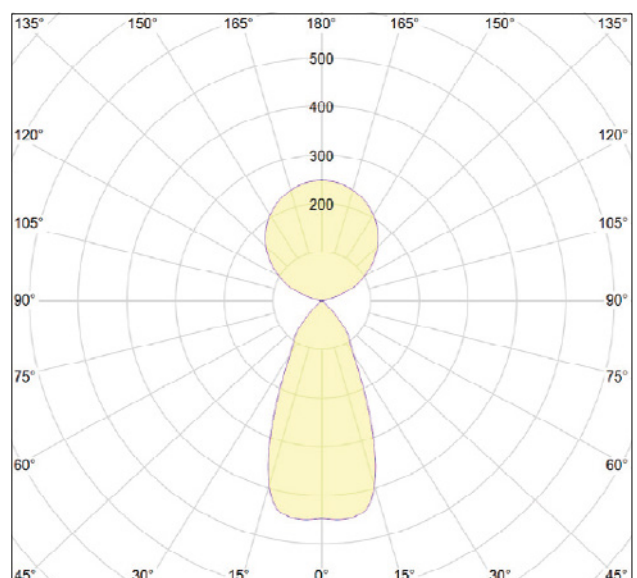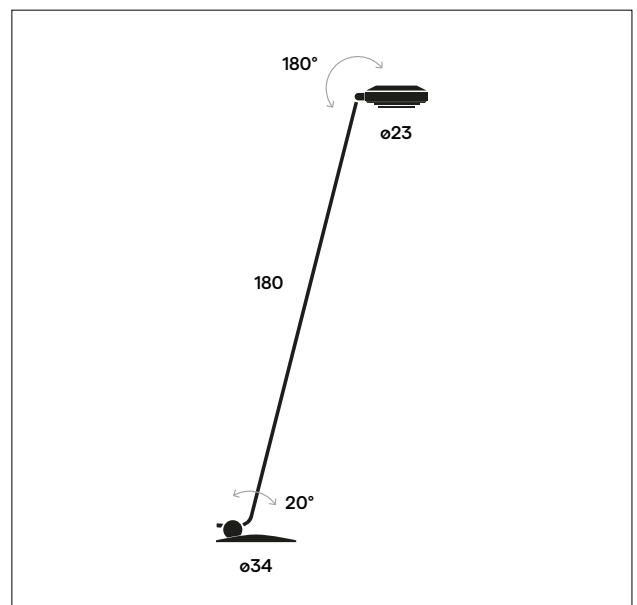

Elle 1



Design: Tommaso Cimini, 2019



Floor lamp for direct and indirect lighting with single pivotable arm. The head can rotate 180° and is provided with a screen grid for glare control. Equipped with a foot on-off and dimmer switch.

Finishing

Standard



Black soft touch
cod. 61L01STK27



Matt white
cod. 61L02OPK27



Brushed nickel
cod. 61L44K27

Special



Metallic bronze
cod. 61L29MTK27

All RAL coating and galvanic finishes available upon request

Light emission



- Light emission: diffuse
- Light direction: downlight, uplight
- Light source: 2 led boards
- Source flux: 3600 lm
- Emitted flux: 2280 lm
- Efficacy: 47,5 lm/W
- CCT: 2700K
- CRI index: >95
- LLMF: 50000 h

Electrical Facts

- Source power: 45 W
- Power absorption: 48 W
- Stand-by absorption: < 1 W
- Grid voltage: 100 – 240 V AC / 50-60 Hz (EU/UK plug equipped)
- Power supply: internal AC-DC converter provided
- Dimmability: on-wire foot dimmer switch
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 6,8 Kg
- Certifications: pending
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

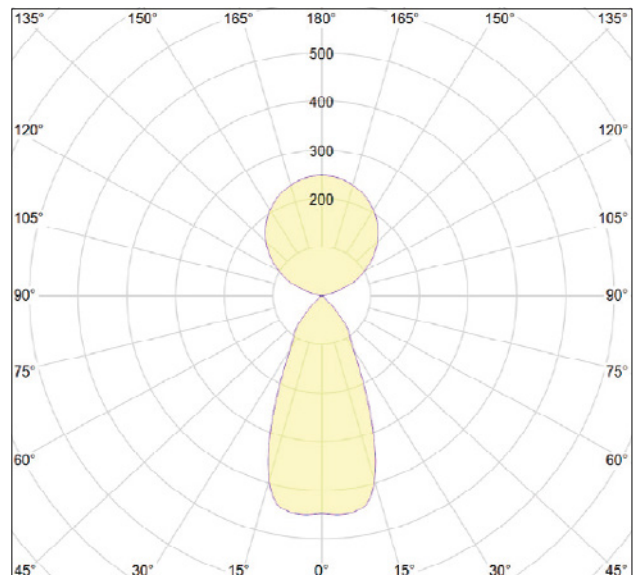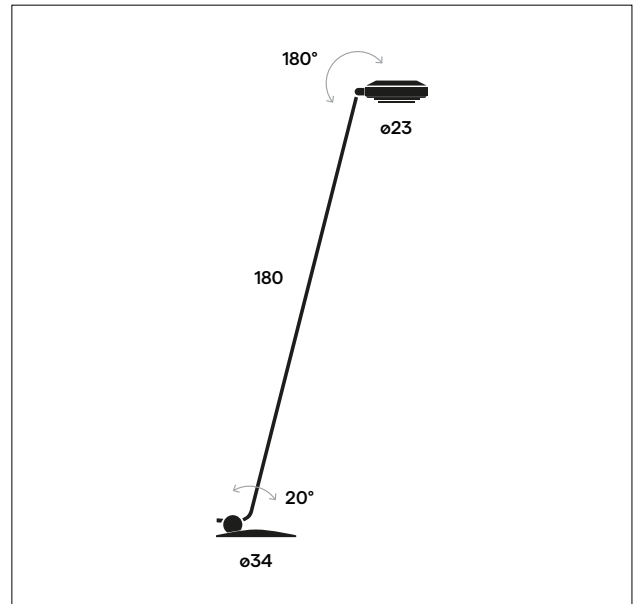

Packaging
cardboard box
211 x 33 x 13 (cm)
0,127 m³

Gross weight
9,3 Kg