

PIN

Design by Ichiro Iwasaki.

Reference

1665.

Application

Floor Lamps

Installation type

Surface

Description

Floor lamp. Design by Ichiro Iwasaki. This reading lamp is characterized by having two diffusers with adjustable heads. Available in white, black, cream and green matt finishes.

Diffuser

Polycarbonate diffuser

Materials

Head: Aluminium

Base: Zamak

Diffuser: Polycarbonate

Rods: Steel

Finish



1665-04 Black (NCS 9000N)



1665-58 Cream (NCS S 2005-Y20R)




1665-62 Green (NCS S 3010-G20Y)



1665-93 White (NCS S 0502-Y)

Sketch



Electrical characteristics

2 x LED 4,5W 350mA

Total 9.0 W



VIBIA



Light source: 2700K CRI >80 900 lm 109 lm/W

Fixture: 417 lm 0 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming NO DIMMING

Technical characteristics

- Switch on the cable

Physical characteristics

1 Box / 1.50 x 0.27 x 0.33 m. / Vol. 0.1308 m³ /
Gross weight 8.3 kg. / Net weight 4.6 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 46.30%

Coordinate system : CG

Total flux : 900.00

Maximum value : 190.85


Light position : C=180.00 G=10.00

Symmetry on the planes : Asymmetric

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=1.10m

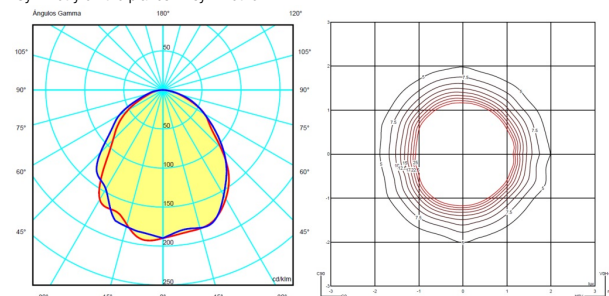

Certificates

