

Starfloor Click 20


Class of Use	EN ISO 10874: 2013	22
--------------	--------------------	----

PRODUCT ID		
Material group		36003
Dimensions	ISO 24342	18,3 x 122 cm = 12/box = 2,68 m ²
Locking system		Lift-2-Lock®
Commercial warranty		10 years residential use

TECHNICAL CHARACTERISTICS		
Total thickness	EN ISO 24346	3,2 mm
Wear layer thickness	EN ISO 24340	0,20 mm
Wear layer binder content	ISO 10582	Type I
Dimension - Length	EN ISO 24342	122 cm
Dimension - Width	EN ISO 24342	18,3 cm
Surface Treatment (PUR)		Supreme
Bevelled edges		Microbevels
Total weight	ISO 29997-EN430	6,8 kg/m ²

TECHNICAL PERFORMANCES		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	Br-s1
Residual indentation	EN ISO 24343-1	≤ 0,08 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Thermal resistance	EN ISO 10456	0,03 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Slip resistance	DIN 51130 / EN 13893	R9 / μ ≥ 0,30
Electrical properties	EN 1815 / EN 1081	<2 kV on concrete / > 10° Ohm
Underfloor heating		Suitable - max. 27 °C

ENVIRONMENT		
TVOC 28 days AgBB test		≤ 100μg/m ³
Recyclable		100%
Plasticizer		Phthalate-free technology

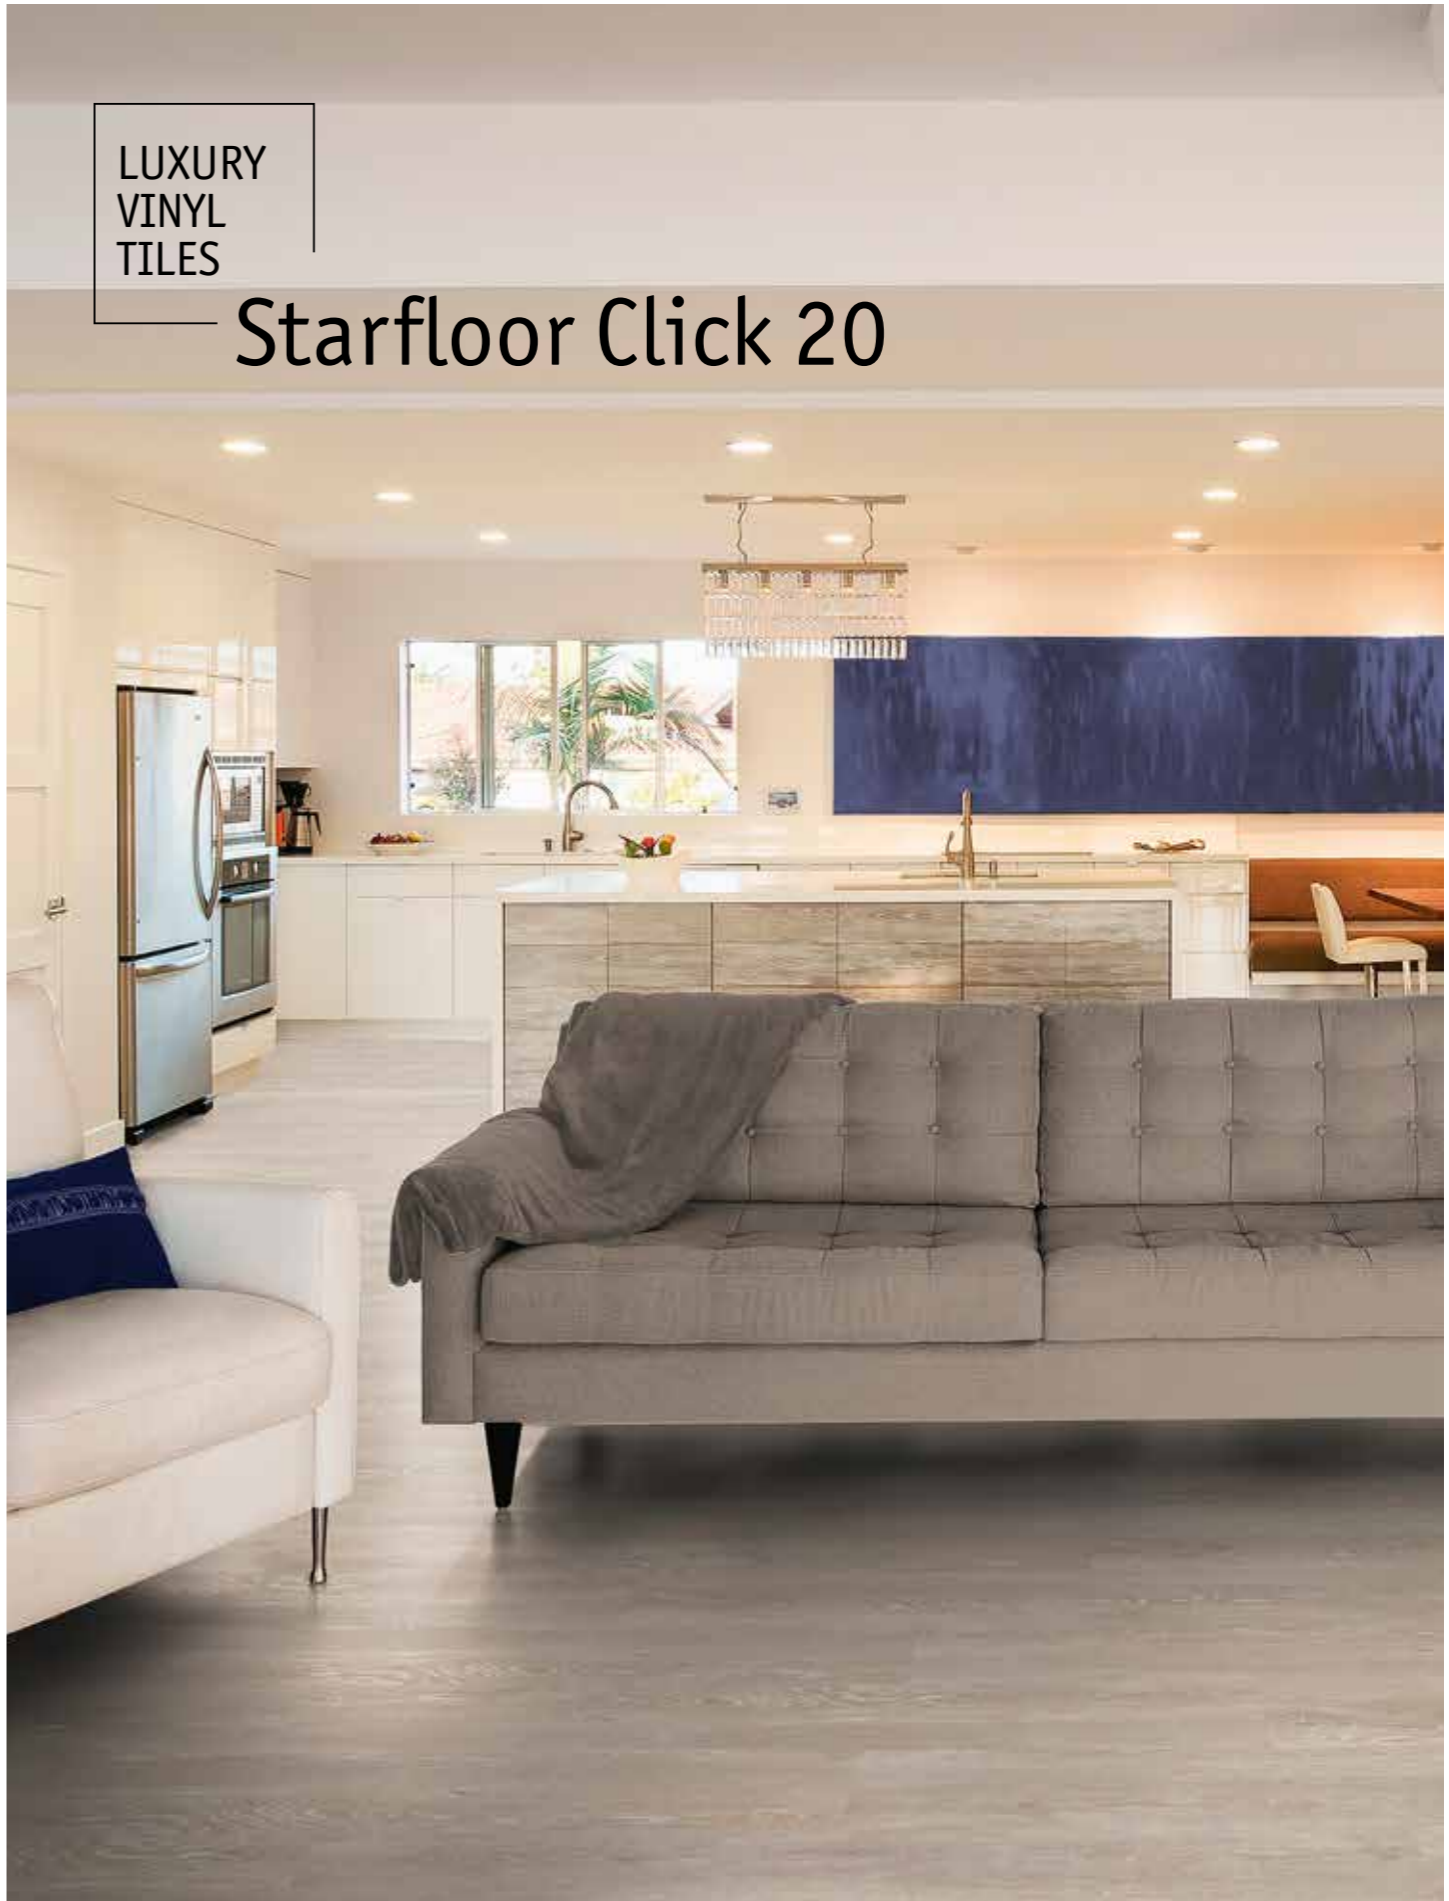

LUXURY
VINYL
TILES

Starfloor Click 20

Starfloor Click 20

The collection Starfloor Click 20 offers a selection of 10 best selling decors fulfilling the needs of most of the home owners.

- Dimensions: 122 x 18,3 mm
- Product thickness: 3.2 mm
- Class of use: 22
- Wear layer: 0.20 mm
- Click system: Lift-2-Lock



Cerused Oak Beige
36003001

Cerused Oak Brown
36003002

Smoked Oak Light Grey
36003003

Smoked Oak Dark Grey
36003004

Beech Natural
36003005

Soft Oak Natural
36003006

Scandinave Wood Beige
36003007

Scandinave Wood White
36003008

Scratched Metal Grey
36003009

Washed Pine Snow
36003010